

# VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)



The VBOX 3i RTK, RACELOGIC's most powerful GPS data logging system, is an RTK enabled version of the VBOX 3i Dual Antenna which can be used in conjunction with an RTK differential Base Station to obtain  $\pm 2$  cm positional accuracy.

VBOX 3i RTK (VB3iSLR) combines high level accuracy and test repeatability with the ability to measure slip and pitch/roll angles at 100 Hz. It's capability of detecting signals from both GLONASS and GPS satellites, makes the 2cm RTK lock robust, resilient and quicker to access.

VBOX 3i RTK is compatible with all existing peripherals including Multifunction Display, 16 bit Analogue Input, 4 Channel Frequency and Pulse Counter Input Module, 8 Channel Thermocouple Interface and Yaw rate sensor.



In conjunction with an RTK DGPS Base Station, VBOX 3i RTK can be used in any number of vehicle tests where positional accuracy and repeatability are of the utmost importance, including ADAS tests like Adaptive cruise control, Auto parking systems development, Blind spot detection, Collision/pedestrian mitigation and Lane departure warning.

VBOX 3i RTK comes with a VBOX Manager, a display enabling you to change the dynamic modes and filter settings, set up slip angle data and define antenna locations.

A Dual Antenna Mounting Pole (needs to be ordered separately) ensures optimum antenna separation and the most accurate attitude measurement.

## Features

- Better than 2 cm positional accuracy with an RTK Base Station,  $\pm 5$  cm vehicle separation accuracy when used in a Moving Base setup
- Resilient RTK lock using GPS + GLONASS satellites
- Measures slip angle, pitch (or roll) angle and yaw rate at 100 Hz
- Very low latency
- 4 x 24 bit differential analogue input channels with  $\pm 50$  V input range and synchronous capture
- Oversampled brake/event trigger input (25 ns)
- RS232 serial, USB & Bluetooth Interface
- Audio voice tagging (microphone included)
- Data logged to compact flash memory card
- 2 x 16 bit user configurable analogue outputs
- 2 x Digital outputs
- User configurable logging conditions
- Logging rate selectable to 100 Hz, 50 Hz, 20 Hz, 10 Hz, 5 Hz, 1 Hz
- Wide 7 V to 30 V operating range
- Low current consumption
- 2 x CAN Bus interface for data input & output

# VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)




## System

### 100 Hz GPS Engine

VB3iSLR features a powerful GPS engine embracing twin antennas capable of providing 100 Hz signal update rate for all GPS / GLONASS parameters (i.e. velocity, heading & position). Velocity and heading are calculated via Doppler Shift in the GPS carrier signal, providing you with unparalleled data accuracy. In addition to GPS, the VB3iSL tracks the Russian GLONASS range of satellites. The advantage of using both satellite constellations is that there are almost twice as many satellites in view: this helps to maintain a robust satellite lock in areas where 'GPS only' reception can cause data interruption.

### Dual Antenna

Utilising two GPS antennas additional parameters can be measured. Slip and pitch/roll angles can now be more accurately defined, making this system ideal for vehicle dynamics testing.

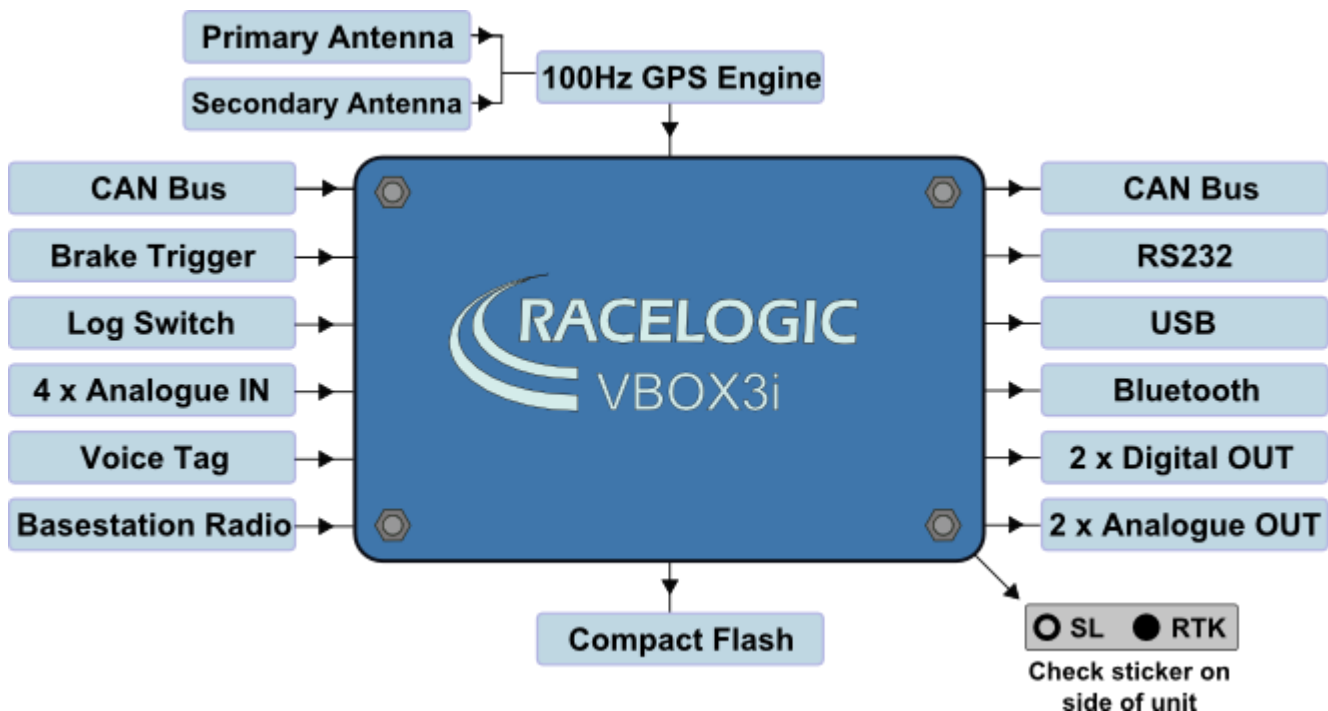

Note: On a VBOX 3i RTK the 'SL' and the 'RTK' features are ticked on the silver serial label. All units with the 'IMU04 ready' sticker can be used for GPS/INS integration using the IMU04.

### Compact Flash

VB3iSLR can accept Type I compact flash cards to log data. Data is stored in a standard PC format allowing fast transfer of data to a PC equipped with a compact flash card reader. The file format is an ASCII text file that can be loaded directly into VBOX Tools software, or imported into Excel and other third party software.

# VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)



## Inputs / Outputs

| Inputs  | Outputs  |
|---|--|
| <b>CAN Bus</b><br>Two CAN Bus interfaces are available on VB3iSLR. By utilising separate CAN Bus connections it allows data to be logged from external modules (e.g. TC8, FIM02). Up to 16 CAN signals can also be logged from a different CAN source (e.g. Vehicle CAN Bus). When logging data from another source, VBOX Tools can load signal data from an industry standard CAN database file (.DBC).  | <b>CAN Bus</b><br>One of the two VBOX CAN ports can be used to output VBOX GPS parameters plus any 12 channels from connected input modules or internal AD channels. The baud rate and CAN id's for these outputs are user configurable.   |
| <b>Brake Trigger</b><br>By using a physical pressure switch on the brake pedal, a precise 'start of braking event' can be captured.   | <b>RS232</b><br>RS232 connector is used for VBOX configuration and output of real-time GPS data. Serial data sent to the software is limited by the bandwidth of the PC serial port – 20 Hz (Full 100 Hz serial is available via USB / Bluetooth).                                       |
| <b>Log Switch</b><br>A start/stop logging switch allows users to manually choose when they wish to record data.   | <b>USB</b><br>VB3iSLR USB connector can be used for VBOX Configuration to output real-time data at 100 Hz.   |
| <b>4x Analogue Input</b><br>Each of the four Analogue Input channels on a VB3iSLR has a dedicated 24 bit analogue converter. Data is recorded from each channel simultaneously to avoid latency between analogue channel data. The name, scale and offset of each Analogue Input channel can be adjusted using VBOX Tools software to allow sensor calibration and therefore logging of data in standard SI units.<br><br>The Analogue Input connector also provides two power outputs that may be used for driving sensors. These are in the form of a 5v DC isolated supply and an output equal to the VBOX power supply voltage. | <b>2x Analogue Outputs</b><br>2x 16 bit analogue outputs can be configured to output velocity (or other GPS parameters) for use by additional data logging equipment. The voltage output range is from 0 to 5 V DC with a resolution of 76 µV per bit.                                   |
| <b>Voice Tagging</b><br>VB3iSLR can record a GPS synchronised WAV audio tag up to 30 seconds long to a time accuracy of 0.5 sec. The recorded WAV file is then logged to the CF card.   | <b>2x Digital Outputs</b><br>Two digital outputs are available. One Digital output is assigned to Speed/Distance – configurable via Pulses per Meter. While the second is a level switch output enabling users to select any one of the logged channels and assign it a threshold value. |
| <b>Power Supply</b><br>VB3iSLR can accept a supply voltage between 7 to 30 V DC. Low current consumption results in extended battery life.  | <b>Bluetooth</b><br>VB3iSLR comes equipped with an internal Bluetooth Radio allowing remote configuration and remote output of real-time GPS data to any Bluetooth capable PC or Data logger. The Bluetooth connection is capable of sending data at the full 100 Hz rate.               |

# VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)



## GPS Specifications

| Velocity                |                                    | Distance           |                        |
|-------------------------|------------------------------------|--------------------|------------------------|
| <b>Accuracy</b>         | 0.1 km/h (averaged over 4 samples) | <b>Accuracy</b>    | 0.05 % (<50 cm per km) |
| <b>Units</b>            | km/h or mph                        | <b>Units</b>       | m / ft                 |
| <b>Update rate</b>      | 100 Hz                             | <b>Update rate</b> | 100 Hz                 |
| <b>Maximum velocity</b> | 1000 mph                           | <b>Resolution</b>  | 1 cm                   |
| <b>Minimum velocity</b> | 0.1 km/h                           |                    |                        |
| <b>Resolution</b>       | 0.01 km/h                          |                    |                        |
| <b>Latency</b>          | 8.5 ms $\pm$ 1 or 15.5 ms ***      |                    |                        |

| Absolute Positioning                 |                 | Time                                     |          |
|--------------------------------------|-----------------|--|----------|
| <b>Accuracy</b>                      | 2 m 95 % CEP*   | <b>Accel/Brake Test (MFD/VBOX Tools)</b> |          |
| <b>Accuracy (SBAS DGPS)</b>          | <1 m 95 % CEP*  | <b>Resolution</b>                        | 0.01 s   |
| <b>Accuracy (EGNOS DGPS)</b>         | 70 cm 95 % CEP* | <b>Accuracy</b>                          | 0.01 s   |
| <b>Accuracy (WAAS DGPS)</b>          | 1.5 m 95 % CEP* | <b>Lap Timing (OLED/VBOX Tools)</b>      |          |
| <b>Accuracy (RTCM DGPS)</b>          | 80 cm 95 % CEP* | <b>Resolution</b>                        | 0.01 s   |
| <b>Accuracy (RTK DGPS)</b>           | 2 cm 95 % CEP*  | <b>Accuracy</b>                          | 0.01 s** |
| <b>Update rate</b>                   | 100 Hz          |  |          |
| <b>Resolution</b>                    | 1.8 mm          |  |          |
| <b>Height accuracy</b>               | 6 m 95 % CEP*   |  |          |
| <b>Height accuracy with DGPS</b>     | 2 m 95 % CEP*   |  |          |
| <b>Height Accuracy with RTK DGPS</b> | 2 cm 95 % CEP*  |  |          |

| Acceleration       |        | Environmental and physical   |                   |
|--------------------|--------|------------------------------|-------------------|
| <b>Accuracy</b>    | 0.50 % | <b>Weight</b>                | Approx. 900 g     |
| <b>Maximum</b>     | 20 G   | <b>Size</b>                  | 170 x 121 x 41 mm |
| <b>Resolution</b>  | 0.01 G | <b>Operating temperature</b> | -20°C to +70°C    |
| <b>Update rate</b> | 100 Hz | <b>Storage temperature</b>   | -30°C to +80°C    |

| Heading           |       | Brake stop accuracy |            |
|-------------------|-------|---------------------|------------|
| <b>Resolution</b> | 0.01° | <b>Accuracy</b>     | +/- 1.8 cm |
| <b>Accuracy</b>   | 0.1°  |                     |            |

| Memory                |                                      | Power                      |                |
|-----------------------|--------------------------------------|----------------------------|----------------|
| <b>Compact Flash</b>  | Type I                               | <b>Input Voltage Range</b> | 7 – 30 V DC    |
| <b>Recording time</b> | Dependent on flash card capacity**** | <b>Power</b>               | Max. 5.5 Watts |

\* 95 % CEP (Circle of Error Probable) means 95 % of the time the position readings will fall within a circle of the stated Radius. 2cm accuracy requires an RTK option and RTK enabled Base Station

\*\* Not using DGPS and crossing the start/finish line at 100 km/h

\*\*\* With fixed CAN latency.

\*\*\*\* Approximately 29 MB per hour used when logging GPS data at 100 Hz; Approx. 182 MB per hour total logging capacity.

# VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)



## Slip, Pitch, Roll Angle Accuracies

| Antenna Separation | Slip Angle (RMS) | Pitch / Roll Angle (RMS) |
|--------------------|------------------|--------------------------|
| 0.5 m              | <0.2°            | <0.14°                   |
| 1.0 m              | <0.1°            | <0.07°                   |
| 1.5 m              | <0.067°          | <0.047°                  |
| 2.0 m              | <0.05°           | <0.035°                  |
| 2.5 m              | <0.04°           | <0.028°                  |

## Outputs

| CAN Bus                |   |
|------------------------|---|
| <b>Bit rate</b>        | 125 Kbits, 250 Kbits ,500 Kbits & 1 Mbit selectable baud rate   |
| <b>Identifier type</b> | Standard 11 bit 2.0 A   |
| <b>Data available</b>  | Satellites in View, Latitude, Longitude, Velocity, Heading, Altitude, Vertical Velocity, Distance, Longitudinal Acceleration & Lateral Acceleration, Distance from Trigger, Trigger, Time, Trigger Velocity |

| Analogue   |  | Digital  |   |
|--|--|--|---|
| <b>Voltage range</b>   | 0 – 5 V DC   | <b>Frequency range</b>   | DC to 44.4 KHz  |
| <b>Default setting</b><br>(The range settings can be adjusted by the user in VBOX Tools Software.) | Velocity<br>0.0125 Volts per km/h<br>(0 to 400 km/h) | <b>Default setting</b><br>(The range settings can be adjusted by the user in VBOX Tools Software.) | Velocity<br>25 Hz per km/h (0 to 400 km/h)<br>90 pulses per metre |
| <b>Accuracy</b>  | 0.1 km/h   | <b>Accuracy</b>  | 0.1 km/h  |
| <b>Update rate</b>   | 100 Hz   | <b>Update rate</b>   | 100 Hz  |

## Inputs

| CAN Bus                  |   |
|--------------------------|---|
| <b>RACELOGIC modules</b> | Up to 32 channels from any combination of ADC02, ADC03, FIM02, TC8, YAW03 or CAN01  |
| <b>External CAN Bus</b>  | 16 channels of user definable CAN signal from external bus, e.g. Vehicle CAN bus<br>Can load signal data from industry standard DBC database file |

| Analogue                    |                             | Digital                       |  |
|-----------------------------|-----------------------------|-------------------------------|--|
| <b>Number of channels</b>   | 4                           | <b>Brake event trigger</b>    | 25 ns resolution                         |
| <b>Input range</b>          | ±50 V                       | <b>On/Off logging control</b> | Remote log control from hand-held switch |
| <b>Input voltage</b>        | 0-5 V                       |                               |  |
| <b>Channel sample order</b> | Synchronous                 |                               |  |
| <b>Resolution</b>           | 24 bit                      |                               |  |
| <b>DC accuracy</b>          | ± 2 mV (calibrated at 23°C) |                               |  |

# VBOX 3i Dual Antenna RTK

High positional accuracy for ADAS Testing (VB3iSLR)



## Hardware & Software Support

| Support  |   |
|----------|---|
| Hardware | One Year Support Contract   |
| Software | Lifetime Support Contract: Valid for a minimum of 5 years from the date of purchase and limited to the original purchaser. Contract includes: telephone/ email technical support provided by local VBOX Distributor and firmware/ software upgrades (where applicable). |

## Package Contents

| Description  | Product Code |
|--|--------------|
| 1x VBOX 3i SL unit   | VB3iSL-V5    |
| 1x VBOX Manager  | VBFMAN       |
| 1x VBOX Mains Charger  | RLVBACS020   |
| 2x GPS/GLONASS Low profile antenna (4m removable cable)                | RLACS156     |
| 1x 4GB Compact Flash Card  | RLACS098     |
| 1x VBOX Serial PC cable (5-way LEMO to 9-way D-type serial cable - 2m) | RLCAB001     |
| 1x VBOX 3i Bluetooth antenna   | RLACS119     |
| 1x VBOX 3i Audio Headset   | RLACS120     |
| 1x 25-way D-type connector   | ADC25IPCON   |
| 1x USB 'A' to Mini 'B' 2m cable (USB Configuration)                    | RLCAB066-2   |
| 1x 2-way LEMO power lead to 12V cigar lighter – 2m                     | RLCAB010L    |
| 2x spare fuse 3.15A 250V   | 416-610      |
| 1x USB multi card reader   | RLACS163     |
| 1x 5-Way Lemo to 5-Way Lemo cable – 2m                                 | RLCAB005-C   |
| 1x VBOX Tape Measure   | RLACS091     |
| 1x Spare Antenna Cable   | RLCAB071-4   |
| 1x VBOX Padded carry case  | RLVBACS013   |

Optional: RTK Base Station (RLVBBS4RG) / Twin Antenna Roof Mounting Pole (RLACS171)