

VBOX 3i Dual Antenna


Measures Slip and Pitch/Roll (RLVB3iSL)



A VBOX 3i Dual Antenna (VB3iSL) uses a GPS/GLONASS receiver to achieve high level accuracy has the ability to measure slip and pitch/roll angles at 100 Hz.

Enabling users to intuitively measure set parameters during acceleration, deceleration, braking, ABS and ESP testing, handling and many other types of high dynamic tests, VB3iSL combines a system renowned for accuracy with the ability to record data via additional parameters to a single unit.

VB3iSL is compatible with all existing peripherals; including live displays, 16 bit Analogue Input, 4 Channel Frequency and Pulse Counter Input Module, Thermocouple Interface and Yaw rate sensor.

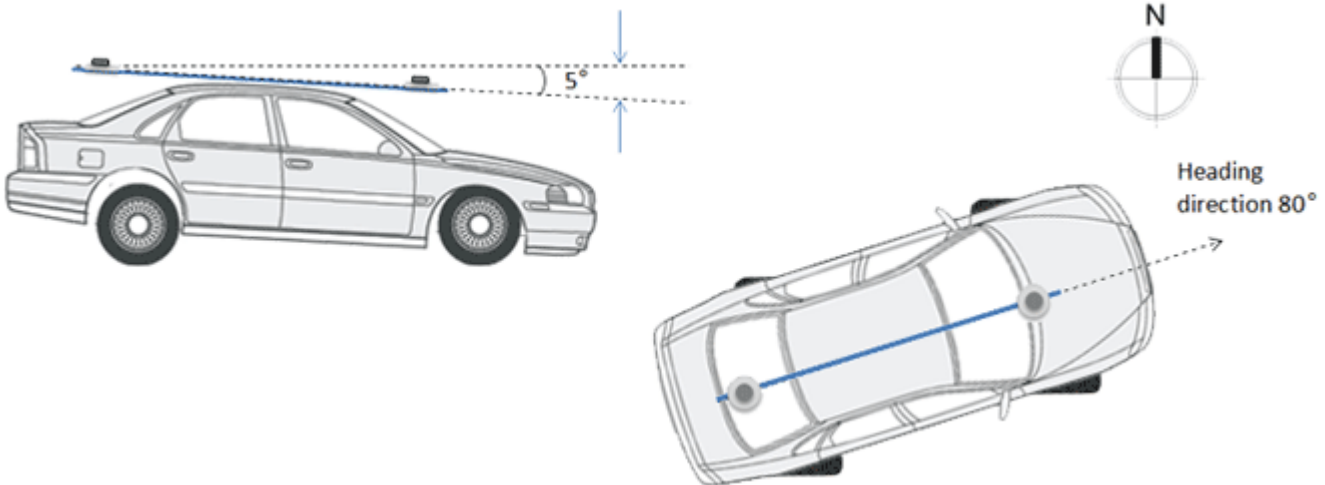

Included within the VB3iSL package is configuration display and a roof-mounting pole. VBOX Manager enables you to change the dynamic modes and filter settings, set up slip angle data and define antenna locations. The Dual Antenna Mounting Pole (max. width 2.5m) ensures the most accurate attitude measurement.

Features

- Simultaneous measurement of slip angle, pitch/roll Angle, yaw rate, true heading, and lat./long. velocity
- Very low latency: 8.5 ± 1.5 mS
- 4 x analogue inputs / 2 x digital outputs
- 1x default CAN Bus port for input module expansion
- 1x configurable CAN Bus for vehicle CAN interface or VBOX data output
- Oversampled brake/event trigger
- Non-contact 100 Hz data acquisition using GPS and GLONASS
- Audio voice tagging
- Bluetooth, USB and RS-232 serial interface
- Data logged to Compact Flash Card
- 2 x 16 bit user configurable analogue outputs
- User configurable logging conditions

VBOX 3i Dual Antenna

Measures Slip and Pitch/Roll (RLVB3iSL)




System

100 Hz GPS Engine

VB3iSL features a powerful GPS engine embracing twin antennas capable of providing 100 Hz signal update rate for all GPS / GLONASS parameters (i.e. velocity, heading & position). Velocity and heading are calculated via Doppler Shift in the GPS carrier signal, providing you with unparalleled data accuracy. In addition to GPS, the VB3iSL tracks the Russian GLONASS range of satellites. The advantage of using both satellite constellations is that there are almost twice as many satellites in view: this helps to maintain a robust satellite lock in areas where 'GPS only' reception can cause data interruption.

Dual Antenna

Utilising two GPS/ GLONASS antennas additional parameters can be measured. Slip and pitch/roll angles can now be more accurately defined, making this system ideal for vehicle dynamics testing.

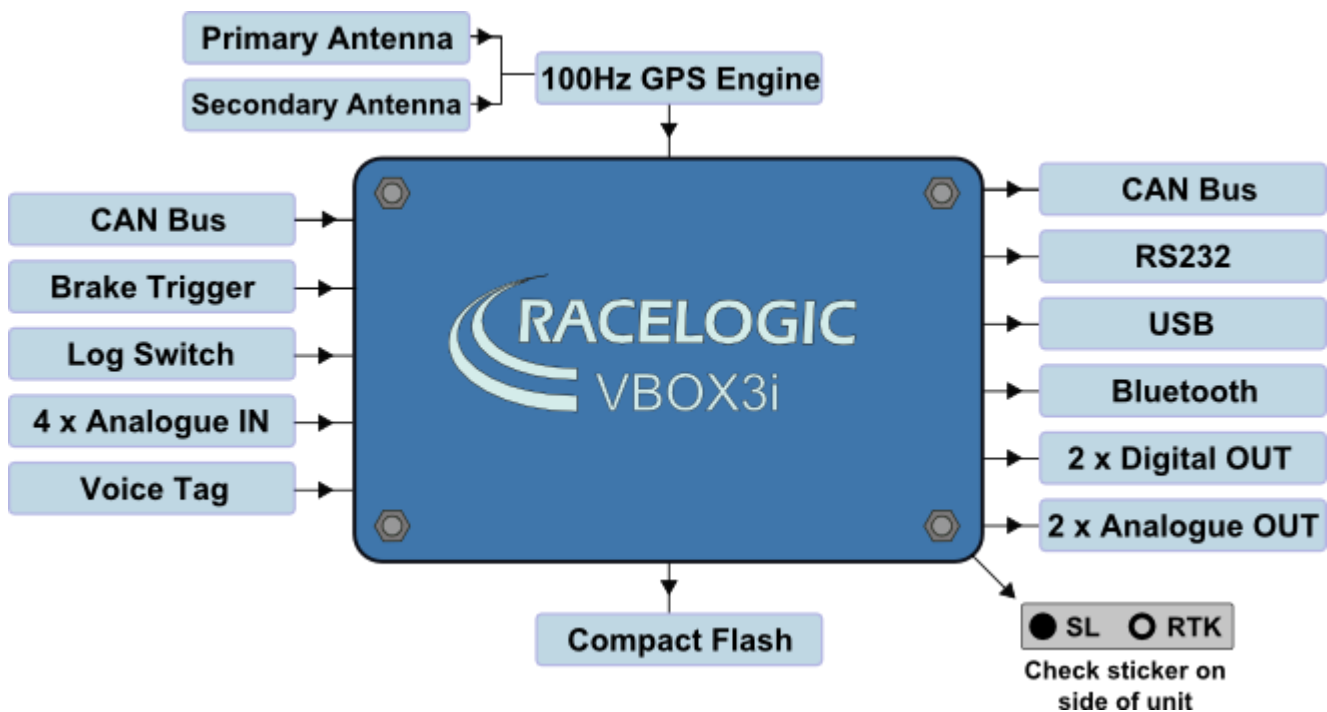

Note: On a VBOX 3i Dual Antenna the 'SL' feature is ticked on the silver serial label. All units with the 'IMU04 ready' sticker can be used for GPS/INS integration using the IMU04.

Compact Flash

VB3iSL can accept Type I compact flash cards to log data. Data is stored in a standard PC format allowing fast transfer of data to a PC equipped with a compact flash card reader. The file format is an ASCII text file that can be loaded directly into VBOX Tools software, or imported into Excel and other third party software.

VBOX 3i Dual Antenna

Measures Slip and Pitch/Roll (RLVB3iSL)



Inputs / Outputs

Inputs	Outputs
<p>CAN Bus Two CAN Bus interfaces are available. By utilising separate CAN Bus connections it allows data to be logged from external modules (e.g. TC8, FIM02). Up to 16 CAN signals can also be logged from a different CAN source (e.g. Vehicle CAN Bus). When logging data from another source, VBOX Tools can load signal data from an industry standard CAN database file (.DBC).</p>	<p>CAN Bus One of the two VBOX CAN ports can be used to output VBOX GPS parameters plus any 12 channels from connected input modules or internal AD channels. The baud rate and CAN id's for these outputs are user configurable.</p>
<p>Brake Trigger By using a physical pressure switch on the brake pedal, a precise 'start of braking event' can be captured.</p>	<p>RS232 RS232 connector is used for VBOX configuration and output of real-time GPS data. Serial data sent to the software is limited by the bandwidth of the PC serial port - 20 Hz (Full 100 Hz serial is available via USB / Bluetooth).</p>
<p>Log Switch A start/stop logging switch allows users to manually choose when they wish to record data.</p>	<p>USB VB3iSL USB connector can be used for VBOX Configuration to output real-time data at 100 Hz.</p>
<p>4x Analogue Input Each of the four Analogue Input channels on a VB3iSL has a dedicated 24 bit analogue converter. Data is recorded from each channel simultaneously to avoid latency between analogue channel data. The name, scale and offset of each Analogue Input channel can be adjusted using VBOX Tools software to allow sensor calibration and therefore logging of data in standard SI units.</p> <p>The Analogue Input connector also provides two power outputs that may be used for driving sensors. These are in the form of a 5v DC isolated supply and an output equal to the VBOX power supply voltage.</p>	<p>2x Analogue Outputs 2x 16 bit analogue outputs can be configured to output velocity (or other GPS parameters) for use by additional data logging equipment. The voltage output range is from 0 to 5 V DC with a resolution of 76 µV per bit.</p> <p>2x Digital Outputs Two digital outputs are available. One Digital output is assigned to Speed/Distance – configurable via Pulses per Meter. While the second is a level switch output enabling users to select any one of the logged channels and assign it a threshold value.</p>
<p>Voice Tagging VB3iSL can record a GPS synchronised WAV audio tag up to 30 seconds long to a time accuracy of 0.5 sec. The recorded WAV file is then logged to the CF card.</p>	<p>Bluetooth VB3iSL comes equipped with an internal Bluetooth Radio allowing remote configuration and remote output of real-time GPS data to any Bluetooth capable PC or Data logger. The Bluetooth connection is capable of sending data at the full 100 Hz rate.</p>
<p>Power Supply VB3iSL can accept a supply voltage between 7 to 30 V DC. Low current consumption results in extended battery life.</p>	

VBOX 3i Dual Antenna

Measures Slip and Pitch/Roll (RLVB3iSL)



GPS Specifications

Velocity		Distance	
Accuracy	0.1 km/h (averaged over 4 samples)	Accuracy	0.05 % (<50 cm per Km)
Units	km/h or mph	Units	metres / feet
Update rate	100 Hz	Update rate	100 Hz
Maximum velocity	1000 mph	Resolution	1 cm
Minimum velocity	0.1 km/h		
Resolution	0.01 km/h		
Latency	8.5 ms ±1 or 15.5 ms***		

Absolute Positioning		Time	
Accuracy	2 m 95% CEP*	Accel/Brake Test (MFD/VBOX Tools)	
Accuracy with SBAS DGPS	<1 m 95% CEP*	Resolution	0.01 s
Accuracy with EGNOS DGPS	70 cm 95% CEP*	Accuracy	0.01 s
Accuracy with WAAS DGPS	1.5 m 95% CEP*		
Accuracy with RTCM DGPS	80 cm 95% CEP*		
Update rate	100 Hz	Lap Timing (OLED/VBOX Tools)	
Resolution	1.8 mm	Resolution	0.01 s
Height accuracy	6 m 95% CEP*	Accuracy	0.01 s**
Height accuracy with DGPS	2 m 95% CEP*		

Acceleration		Environmental and physical	
Accuracy	0.50%	Weight	Approx. 900 g
Maximum	20 G	Size	170 x 121 x 41mm
Resolution	0.01 G	Operating temperature	-20°C to +70°C
Update rate	100 Hz	Storage temperature	-30°C to +80°C

Heading		Brake stop accuracy	
Resolution	0.01°	Accuracy	+/- 1.8 cm
Accuracy	0.1°		

Memory		Power	
Compact Flash	Type I	Input Voltage Range	7 – 30 V DC
Recording time	Dependent on flash card capacity****	Power	Max. 5.5 Watts

* 95% CEP (Circle of Error Probable) means 95% of the time the position readings will fall within a circle of the stated Radius.

** Not using DGPS and crossing the start/finish line at 100 km/h

*** With fixed CAN latency.

**** Approximately 29 MB per hour used when logging GPS data at 100 Hz; Approx. 182 MB per hour total logging capacity

VBOX 3i Dual Antenna

Measures Slip and Pitch/Roll (RLVB3iSL)



Slip, Pitch, Roll Angle Accuracies

Antenna Separation	Slip Angle (RMS)	Pitch / Roll Angle (RMS)
0.5 m	<0.2°	<0.14°
1.0 m	<0.1°	<0.07°
1.5 m	<0.067°	<0.047°
2.0 m	<0.05°	<0.035°
2.5 m	<0.04°	<0.028°

Outputs

CAN Bus	
Bit rate	125 Kbits, 250 Kbits ,500 Kbits & 1 Mbit selectable baud rate
Identifier type	Standard 11 bit 2.0 A
Data available	Satellites in View, Latitude, Longitude, Velocity, Heading, Altitude, Vertical Velocity, Distance, Longitudinal Acceleration & Lateral Acceleration, Distance from Trigger, Trigger, Time, Trigger Velocity

Analogue		Digital	
Voltage range	0 – 5 V DC	Frequency range	DC to 44.4 KHz
Default setting (The range settings can be adjusted by the user in VBOX Tools Software.)	Velocity 0.0125 Volts per km/h (0 to 400 km/h)	Default setting (The range settings can be adjusted by the user in VBOX Tools Software.)	Velocity 25 Hz per km/h (0 to 400 km/h) 90 pulses per metre
Accuracy	0.1 km/h	Accuracy	0.1 km/h
Update rate	100 Hz	Update rate	100 Hz

Inputs

CAN Bus	
RACELOGIC modules	Up to 32 channels from any combination of ADC02, ADC03, FIM02, TC8, YAW03 or CAN01
External CAN Bus	16 Channels of user definable CAN signal from external bus, e.g. Vehicle CAN bus Can load signal data from industry standard DBC database file

Analogue		Digital	
Number of channels	4	Brake event trigger	25 ns resolution
Input range	±50 V	On/Off logging control Remote log control from hand-held switch	
Input voltage	0-5 V		
Channel sample order	Synchronous		
Resolution	24 bit		
DC accuracy	± 2 mV (calibrated at 23°C)		

VBOX 3i Dual Antenna

Measures Slip and Pitch/Roll (RLVB3iSL)



Hardware & Software Support

Support	
Hardware	One Year Support Contract
Software	Lifetime Support Contract: Valid for a minimum of 5 years from the date of purchase and limited to the original purchaser. Contract includes: telephone/ email technical support provided by local VBOX Distributor and firmware/ software upgrades (where applicable).

Package Contents

Description	Product Code
1x VBOX 3i SL unit	VB3iSL-V5
1x VBOX Manager	VBFMAN
1x Twin Antenna Roof Mounting Pole (2.5m max.)	RLACS171
1x VBOX Mains Charger	RLVBACS020
2x GPS/GLONASS Ground Plane Antenna with 4m removable cable	RLACS156
1x 4GB Compact Flash Card	RLACS098
1x VBOX Serial PC cable (5-way LEMO to 9-way D-type serial cable - 2m)	RLCAB001
1x VBOX 3i Bluetooth antenna	RLACS119
1x VBOX 3i Audio Headset	RLACS120
1x 25-way D-type connector	ADC25IPCON
1x USB 'A' to Mini 'B' 2m cable (USB Configuration)	RLCAB066-2
1x 2-way LEMO power lead to 12V cigar lighter – 2m	RLCAB010L
2x spare fuse 3.15A 250V	416-610
1x USB multi card reader	RLACS163
1x 5-Way Lemo to 5-Way Lemo cable – 2m	RLCAB005-C
1x VBOX User Manual	VB3iMAN
1x VBOX Tools Software Manual	VBTOOLSMA5
1x VBOX Tools Software CD	RLVBACS030
1x VBOX Tape Measure	RLACS091
1x Spare Antenna Cable	RLCAB071-4
1x VBOX Padded carry case	RLVBACS013