

Yaw Rate Sensor (RLVBYAW03)



Racelogic's yaw rate sensor (RLVBYAW03) is an advanced vehicle yaw rate sensor with integral accelerometers. The accelerometers are mounted in the X and Y plane for measurement of lateral and longitudinal acceleration.

The RLVBYAW03 is constructed with a splash-proof casing, which is rated to a limited ingress IP rating of IP65, making it ideal for use on boats or in harsh environments.


Using synchronous 24bit sampling for each of the internal sensors provides a high degree of accuracy with yaw rate resolution typically 0.01 degrees per second and acceleration resolution down to 0.001g.



The RLVBYAW03 is designed for use with the Racelogic VBOX range of GPS data acquisition systems or as a stand-alone sensor with simple connection and configuration via the CAN bus interface.

Features

- Yaw rate range $\pm 150^\circ/\text{s}$
- Acceleration range $\pm 1.7\text{g}$ in each axis
- Internal temperature compensation
- Yaw rate resolution $0.01^\circ/\text{s}$
- Acceleration resolution 1mg
- CAN Bus interface

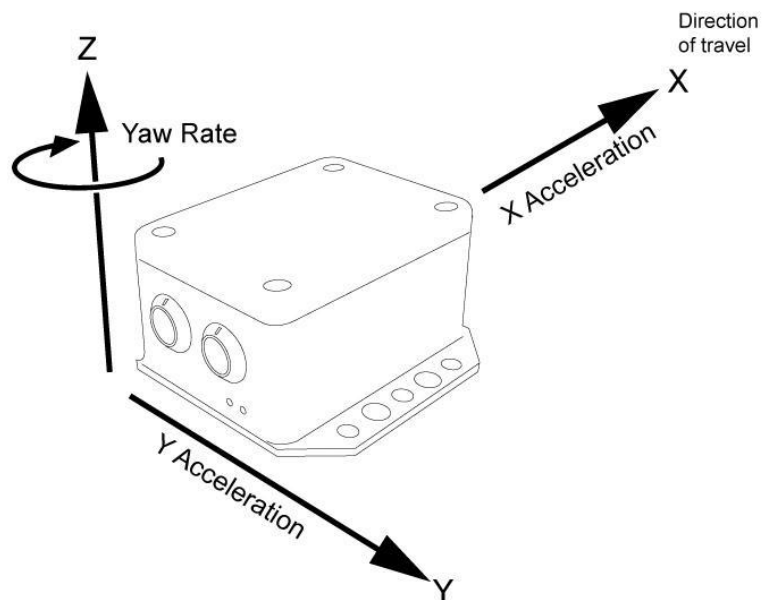

Yaw Rate Sensor

(RLVBYAW03)



Specification

Specification	
Rate sensors	T _A =25°C
Dynamic Range	Full-Scale: ±150°/s
Nonlinearity	% of full scale: 0.1%
Resolution	0.01°/s
Bandwidth	40 Hz
Bias Stability	±0.5°/s
Acceleration	
Range	±1.7G
Nonlinearity	% of full scale: (Min) ±0.5% - (Max) ±2.5
Resolution	1mg
Accuracy	0G-input: ±0.03G
Accuracy	1G-input: ±0.01G
Bandwidth	50 Hz
Max Ratings (Shock)	Powered (0.5ms): 2000g
Temperature Sensor	
Temperature calibration range	-10°C to 50°C
Temperature resolution	0.1°C
Current	~150mA
Voltage	8 – 30V DC.
Operating temperature	-30 to +70 °C


Outputs

Outputs	
Number of Channels	4
Channel Names	Yaw Rate, X acceleration, Y acceleration, Temp

Yaw Rate Sensor (RLVBYAW03)



Dimensions

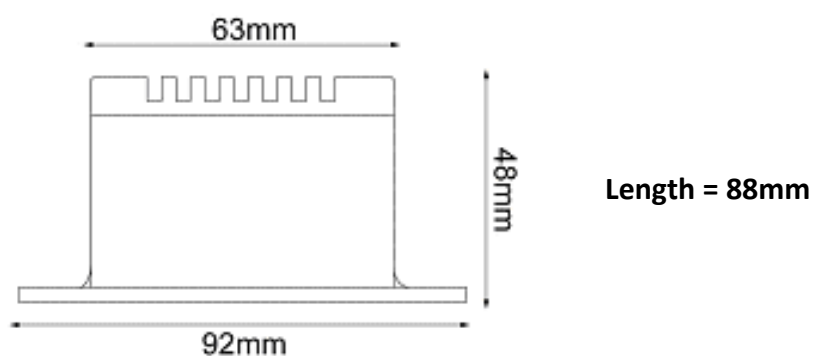

Lemo Socket Connections

Pin	I/O	Function
1	O	TxD, Serial Data Transmit - Configuration
2	I	RxD, Serial Data Receive - Configuration
3	I/O	CAN High
4	I/O	CAN Low
5	O	+ V Power 8V to 30V DC
Chassis		Ground

